

ZINC AIRNABIULLIN, FAAT K. - U.S.S.R.

No. 1048602

ISSUED 790213

AIR-DEPOLARIZED CELL

Nabiullin, Faat K.  
USSR

This invention relates to chemical cells and, in particular, to air-depolarized cells.

The present invention may be employed as a self-contained current source for power supply of consumers' radio and electrical equipment: radio sets, flash lights, electrical watches, pocket calculators, etc.

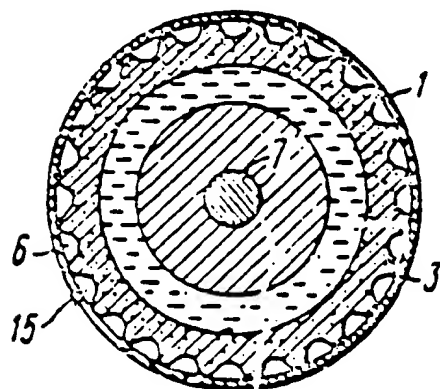


FIG. 2

Best Available Copy

1048602

This invention relates to chemical cells and, in particular, to air-depolarized cells.

The present invention may be employed as a self-contained current source for power supply of consumers' radio and electrical equipment: radio sets, flash lights, electrical watches, pocket calculators, etc.

There is known an air-depolarized cell comprising a case, coaxially arranged positive and negative electrodes divided by an ion-conducting membrane, a lead-out of the negative electrode which is in contact with a metal lid with holes, a pressurizing gasket with a sealing coupling made of plastic material, a bushing with an annular projection pressed into the material of the ion-conducting membrane. To let the oxygen from the air to the positive electrode the latter is provided with vault-like shaped grooves positioned along the axis of the cell.

However, making the grooves in the positive electrode, particularly in miniature cells, is a fairly complicated process due to complicated tools involved and their low durability. Such an electrode is not strong and may be broken in the process of production and in further operation.

Moreover, in the process of production of the positive electrode the mass of the positive electrode soaked with alkali gets on the inner surface of the case edge (where the lid is fitted). In many cases this is the reason of alkali leakage from the cell case.

1048602

The same air-depolarized cell employs a positive electrode pressed into a metallic, e.g. steel perforated drum to strengthen the positive electrode and to let air oxygen thereto. Said perforated drum serves as a current lead-out and its edges are rolled and the outer surface is provided with projections running parallel to the drum axis.

Such construction of the positive electrode in the known air-depolarized cell ensures adequate rigidity, access of the air oxygen to the positive electrode and a reliable contact of the lead-out with the mass of the positive electrode.

However, production of such a drum is fairly complicated and leaves uncured one fundamental deficiency inherent in both forementioned constructions - fouling of the inner surface of the casing neck edge.

The mass of the positive electrode gets on the inner edge of the casing neck in the process of production of the positive electrode inside the casing or when the electrode is installed into the casing being produced outside.

Cleaning each casing is an effort-consuming task and utterly unacceptable in mass production. Moreover, the grooves in the positive electrode or groove-shaped gaps between the cell casing and the metallic perforated drum serving as a lead-out may be stopped or become narrower either in the process of production or in the process of operation. This may be due to the mass of the positive electrode getting therein or

condensed electrolyte which may be squirting in the process of operation from the membrane gap when the volume of the negative electrode mass increases.

It is an object of this invention to provide an air-depolarized cell ensuring prevention of fouling of the inner edge of the casing neck in the process of making the positive electrode and its adequate rigidity.

Another object of this invention is to ensure uniform access of air oxygen to a positive electrode.

10 An object of this invention is to simplify production of a positive electrode lead-out.

In accordance with an embodiment, an air-depolarization cell comprises: a casing with a bottom; first insulating gasket placed on said bottom of said casing; corrugated perforated lead-out placed inside said casing and having a closed shape; a positive electrode made of the mass of the positive electrode and pressed on the inner surface of said corrugated perforated lead-out; said positive electrode having an axial cavity therethrough; a negative electrode placed in said through cavity of said positive electrode on said first insulating gasket; an ion-conducting membrane positioned between said positive and negative electrodes and made concurrently with said negative electrode; a lead-out of said negative electrode positioned in the center of said negative electrode; a bushing slipped on said lead-out of said negative electrode; an annular projection on said bushing inserted into the material of said ion-conducting membrane; a metal lid contacting said lead-out of said negative electrode; said metal lid having holes therethrough; a second insulating gasket positioned around the end and under said metal lid; a sealing coupling made integral with said second insulating gasket and fitted on said lead-out of said negative electrode.

20

30

1048602

It is advisable that at least one groove is made on the corrugated lead-out of the positive electrode connecting the depressions formed by the crimps.

It is also advisable that the crimps of the lead-out of the positive electrode is made so that the ratio between its pitch and height and thickness of the material amounts to 10:5:1.

The present invention ensures production of a positive electrode of an air-depolarized cell preventing the mass of the positive electrode from getting on the inner edge of the casing neck, adequate rigidity of the positive electrode and uniform access of air oxygen on needed amounts, simplifying at the same time the process of production of the positive electrode lead-out.

Other objects and advantages of this invention will become evident below with reference to a specific embodiment thereof and accompanying drawings, wherein:

Fig. 1 is a cut-away view of an air-depolarization cell, according to the invention;

Fig. 2 is a view taken along line II-II of Fig. 1, according to the invention.

Fig. 3 shows a positive electrode lead-out, according to the invention.

An air-depolarization cell comprises a casing I (Fig. 1)

1046802

containing a separating gasket 2 and a coaxially positioned positive electrode 3 and a negative electrode 4 divided by an ion-conducting membrane 5. The positive electrode 3 is made by pressing the ends of the positive electrode onto the inner surface of a lead-out 6 which is corrugated and perforated. A lead-out 7 is placed in the center of the negative electrode 4 and a bushing 8 is slipped thereon. An annular projection on said bushing presses into the material of the ion-conducting membrane 5 protecting the negative electrode 4 from the air oxygen. The casing 1 is covered by a metallic lid 10 with holes 11 shielded by a plastic material of a gasket 12 with a sealing coupling 13, said lid being in contact with the lead-out 7 of the negative electrode 4. A groove 14 is made on the outer side of the corrugated lead-out 6 of the positive electrode 3.

The groove 14 connects depressions 15 (Fig. 2) formed by the crimps of the lead-out 6 of the positive electrode 3.

Perforations (Fig. 3) on the corrugated perforated lead-out 6 (Fig. 1) of the positive electrode 3 are made as shown.

The ratio of the pitch of the crimps of the lead-out 6 to the height of the crimps and to the thickness of the material from which the lead-out 6 is made is 10:5:1.

The thickness of a steel tape for the lead-out 6 depends on the size of the cell and ranges from 0.1 to 0.4 mm.

1048502

The perforations 16 made as slits are not more than 0.3 mm wide and positioned on top of the crimps and perpendicular thereto.

The present invention yields certain technological and economic effects. The structure of the lead-out 6 of the positive electrode 3 prevents fouling of the inner edge of the neck of the casing I and pouring-out of the electrolyte from the cell casing.

Besides, the positive electrode 3 is made within the casing I where the lead-out 6 is placed in advance. This eliminates assembly of the positive electrode in the casing I.

The existing automatic machines producing tubular positive electrodes can be used and, consequently, no special-purpose equipment is to be designed and manufactured.

1048602

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:-



1. An air-depolarization cell comprising:
  - a casing with a bottom;
  - first insulating gasket placed on said bottom of said casing;
  - corrugated perforated lead-out placed inside said casing and having a closed shape;
  - a positive electrode made of the mass of the positive electrode and pressed on the inner surface of said corrugated perforated lead-out;
  - said positive electrode having an axial cavity there-through;
  - a negative electrode placed in said through cavity of said positive electrode on said first insulating gasket;
  - an ion-conducting membrane positioned between said positive and negative electrodes and made concurrently with said negative electrode;
  - a lead-out of said negative electrode positioned in the center of said negative electrode;
  - a bushing slipped on said lead-out of said negative electrode;
  - an annular projection on said bushing inserted into the material of said ion-conducting membrane;
  - a metal lid contacting said lead-out of said negative electrode;
  - said metal lid having holes therethrough;
  - a second insulating gasket positioned around the end and under said metal lid;
  - a sealing coupling made integral with said second insulating gasket and fitted on said lead-out of said negative electrode.



2. A cell as claimed in claim 1, wherein at least one groove is made on the outer surface of said corrugated perforated lead-out of said positive electrode, which connects the depressions formed by crimps of said corrugated perforated lead-out.

3. A cell as claimed in claims 1 or 2, wherein the crimps of said perforated corrugated lead-out of said positive electrode are such that the ratio of its pitch to its height and the thickness of the material from which said lead-out of said positive electrode is made is 10:5:1.



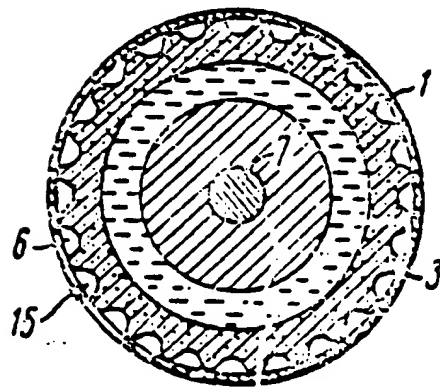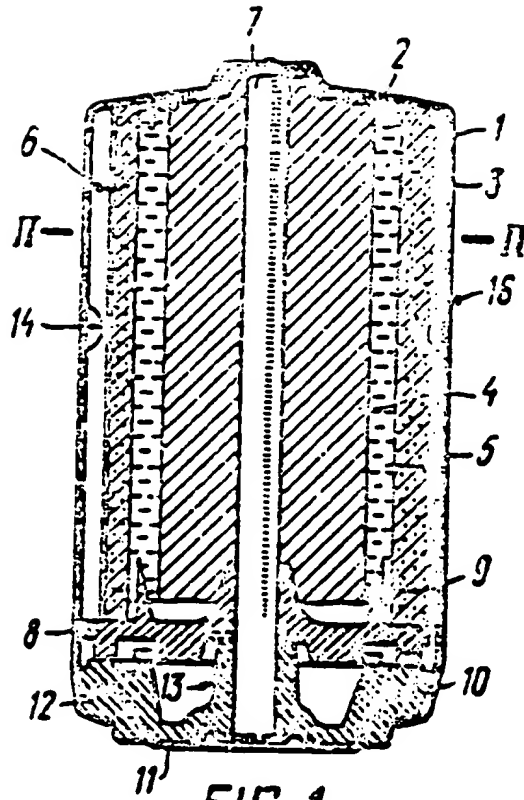

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

---